


STAINLESS STEEL
GREASE TRAP
 STANDARD SERIES

Model No: _____
 Quantity: _____

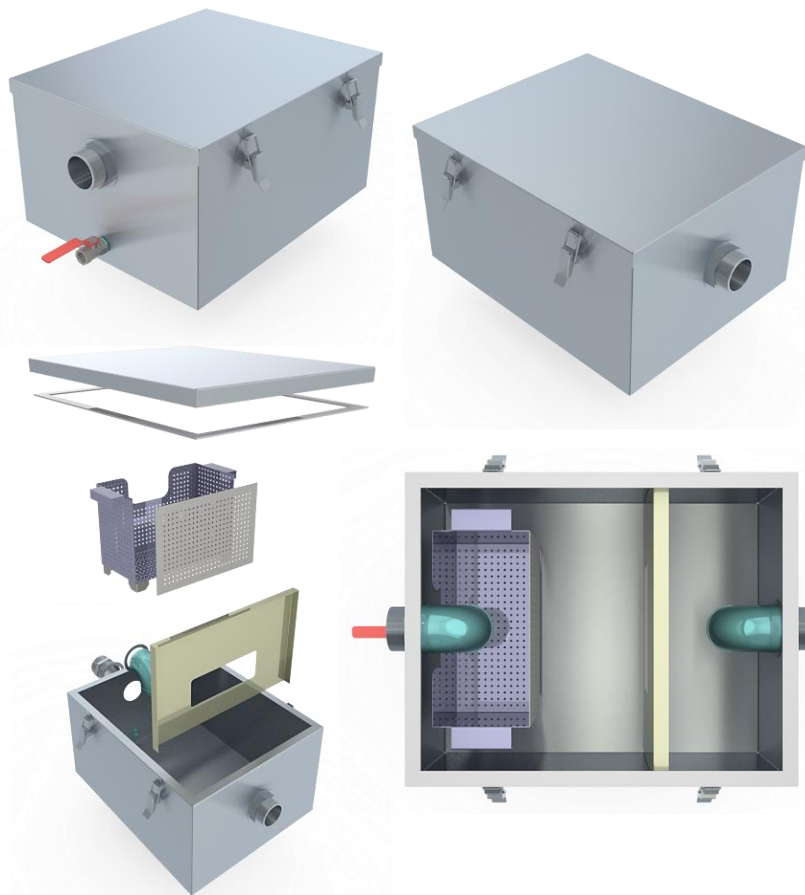

FEATURES:

Full line of grease Traps for installation on cooking/prep sinks, pot and dishwasher applications. Variety configurations covering all different combination of sink compartments. Grease Traps are designed to prevent greasy substances from entering plumbing systems, septic fields and wastewater treatment facilities, where they are difficult to process and can create a number of environmental problems.

CONSTRUCTION:

Fully welded corners ground, polished for a monolithic appearance. Baffles are all TIG welded. Solid steel cover with gasket is fixed with four toggle latches. Removable cover and strainer for maintenance.


MATERIALS:

PARTS	S-LINE (STANDARD)
OUTER BODY	S/S 304 1.5MM THICKNESS
COVER, STRAINER & SEDIMENT BAFFLE	S/S 304 1.0MM THICKNESS
EQUIPMENT BUILT	
SURFACE	HAIRLINE FINISH (304)
ASSEMBLY/SHIPPING	KCD (KNOCKDOWN)


DIMENSIONS:

ITEM NO.	FLOW RATE (GPM)	GREASE CAPACITY (LBS)	LENGTH	WIDTH	HEIGHT	A	B
SGT-504030	10	20	500	400	300	2"	316
SGT-634030	15	30	630	400	300	2"	404
SGT-724330	20	40	720	430	300	3"	439
SGT-804532	25	50	800	450	320	3"	574

SGT-

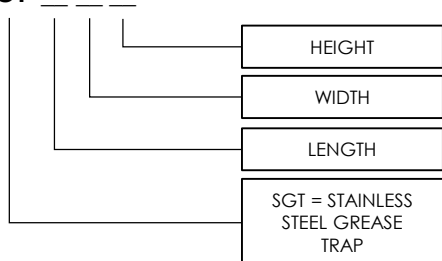

TYPICAL SECTIONS:

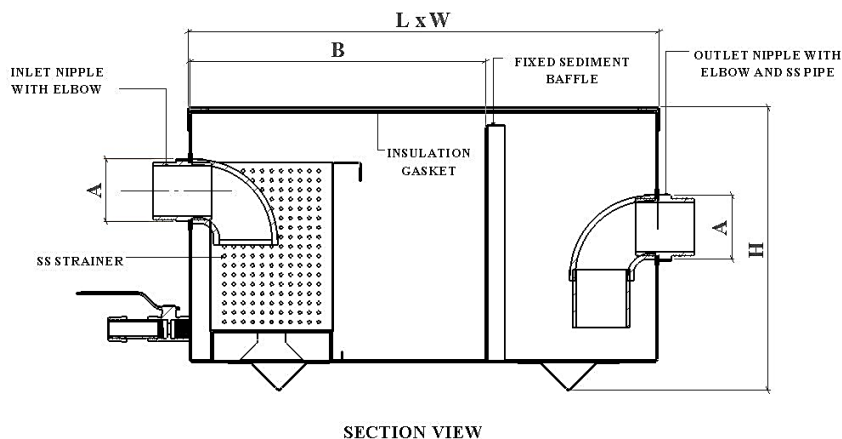

SECTION VIEW